


Avtron M7 Ultra-Low Temperature Encoders

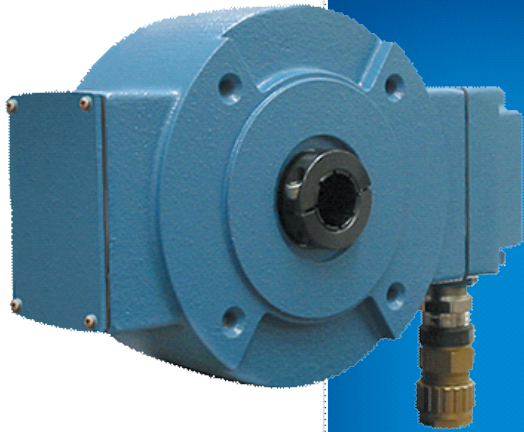

**Severe Duty Hollow Shaft
Mount Ultra-Low Temperature
Magnetic Encoder, 1" to 1 1/8"**

Ready for the Coldest Locations

- Heavy, Mill Duty
 - Up to 1200 PPR -45°C to +80°C
 - Operation
 - Immune to water, oil, dust, dirt, etc.
 - Withstands extreme shock and vibration
 - Extra heavy-duty bearings
 - Optional dual isolated outputs
 - Excellent for oil drilling and gas pipeline applications

M7

Avtron M7 Hollow Shaft

Magnetic Hollow Shaft Mount Encoder, 1" to 1 1/8"


M7-4 and M7-5 heavy mill duty encoders are designed for direct mounting on motor or load shafts, from 1" to 1 1/8".

Forget fragile glass disk encoders! The M7 features Avtron's rugged magnetic sensor and solid metal rotor technology. Our shatterproof, moisture proof systems ensure your application has maximum uptime.

No more tiny stub shafts on big motors or load shafts! The hollow shaft (tethered) models offer direct mounting on big shafts, from 1" to 1 1/8", without flanges, reducers, couplings, or other hardware. No rework is needed; just mount the encoder directly on the shaft, and secure the tether arm. The heavy duty bearings withstand runout and vibration that destroy lesser encoders.

If you have a rough application in a cold location, select an M7 encoder!

OUTLINE DRAWING

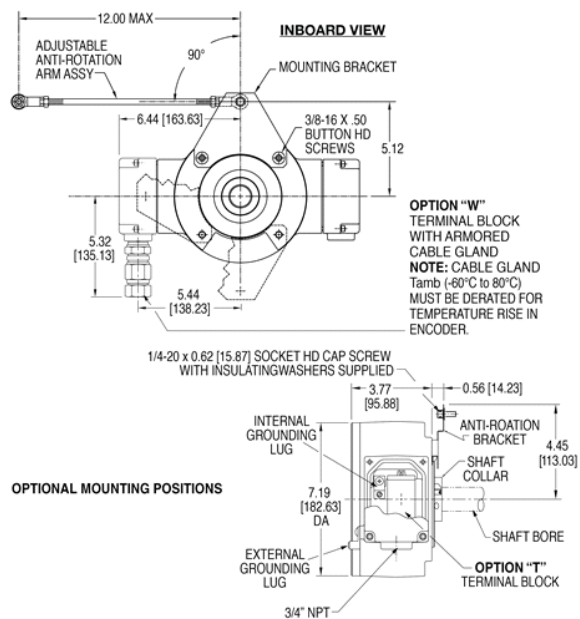

MORE M7 ADVANTAGES

- Threaded rod torque arm for easy tethered mounting
- Highly resistant to electrical and magnetic motor and brake noise
- Second isolated output may be different PPR
- Available armored wire gland
- IP66 Enclosure
- 1 Year No-Hassle Warranty

M7 SPECIFICATIONS

Operating Power:

Volts: 5-24 VDC;

Current: 120mA per output, no load 24VDC

770mA @24VDC heater current required for operation below -40°C

Output Format: A,/A, B,/B; Optional Marker Z,/Z

Frequency Range: 0 to 100 KHz

PPR: 240-1200

Speed: 5000 RPM Max. Std., 1" to 1 1/8" shaft

Temperature: 80°C to -45°C (internal heater operation required below -40°C)

Chemical: Polyurethane enamel paint protects against salt spray, mild acids, and bases

Weight: 16 lbs./7kg.

All dimensions are in inches [millimeters].

Specifications and features are subject to change without notice.

Check out our website for more detailed specifications, drawings, and installation instructions. www.avtronencoders.com

SELECTION GUIDE

M7 PART NUMBERS AND AVAILABLE OPTIONS								
Model	Bore Size	Mounting Style	Line Driver	Left & Right Output Range	Base PPR	Marker	Connector	Modifications
M7-	0- Non-Standard 4- 1" 5- 1 1/8"	S- End-of-shaft	3- 12 to 24 VDC*	X- None L- Low Range (Base PPR x 1/2) M- Medium Range (Base PPR x 1) H- High Range (Base PPR x 2)	48- 480 51- 512 60- 600	Z- Marker - - None	T- Conduit Box, Terminal Block, 3/4" NPT W- Conduit Box, Terminal Block and Wire Gland	000- None

* Units shipped prior to 2009 were rated 18 to 24 volts. Refer to ID tag on the encoder for specific input voltage requirements.



Nidec Industrial Solutions
243 Tuxedo Avenue - Cleveland, Ohio 44131

encoderhelpdesk@nidec-industrial.com
+1 216-642-1230 - www.avtronencoders.com



Features and specifications are subject to change without notice.
 EU-SMART™, SMARTSafe™, SMARTTach™, THIN-LINE™, WIDE-GAP™,
 SAFETach™ and BULLSEYE32™ are trademarks of Nidec Industrial Solution.
 All other trademarks and registered trademarks are the property of their
 respective owners. Nidec Industrial Solutions' standard warranty applies.
 All dimensions approximate.