


# Avtron XR485 SMARTSafe™ Encoders

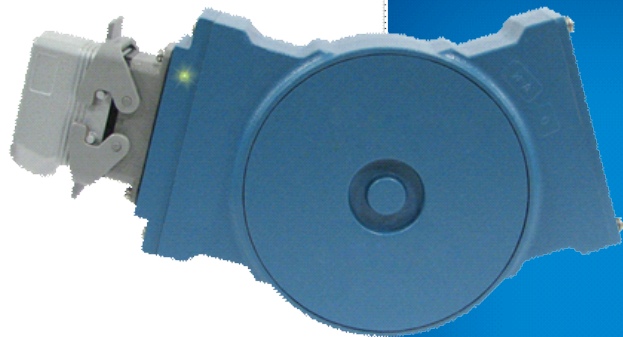

**Severe Duty Magnetic Encoder  
for Hazardous Applications;  
Foot or NEMA 56C Face Mount,  
5/8" Solid Shaft**

## Hazardous Duty Shafted Encoder for Severe Environments

- Severe Mill Duty
- ATEX/IECEx Rated for Zone 1, 2, 21 & 22 Applications
  - Foot or NEMA 56C Face Mount
  - Fully Potted Electronics
  - Up to 5000 PPR
- Self-Diagnostic LED and Alarm Output
  - 1 Year No-Hassle Warranty
- cULus Class I Div 1 Groups A,B,C,D
  - cULus Class I Zone 0 Group IIC
  - cULus Class I Div 2 Groups A,B,C,D

## XR485

XR485 SMARTSafe solid shaft encoders are a breakthrough in hazardous duty encoders for NEMA C-face and foot mount applications. They are ATEX/IECEx and UL approved and offer incredibly reliable construction! SMARTSafe encoders can be used in ATEX/IECEx gas and dust and UL gas hazardous environments. Also available: hollow shaft models (XR45, XR685), Euro shafted models (XR4F), no-bearing modular encoders (XR56, XR85, XR115, XR125, XR850), and modular sensors (XR5, XR12).

For applications requiring ATEX/IECEx Zone 2 or 22 or UL Class I, Division 2, Groups A,B,C,D, use the XR485 directly in your application, with no barrier, isolator or cable gland required.


For applications requiring UL Division 1, ATEX/IECEx Zone 1 or 21 use the XRB3 isolator in your control cabinet which permits the use of intrinsically safe wiring instead of explosion proof conduit or glands. XRB3 Isolator Systems enable use in Class I Div 1 and Zone 0 applications.

Unlike the competition, Avtron SMARTSafe encoder systems are fully protected against short circuits, power-to-output wiring, and output-to-ground faults at every point. Wiring errors won't harm this system!

Instead of depending on a tiny optical encoder with weak bearings use XR485. Vibration, shock, liquids, dust and dirt won't harm SMARTSafe XR485 encoders! Paint booths, draw works, coil tubing rigs...XR485 can keep them all working 24/7/365.

Eliminate encoder failures in your hazardous environment application-select XR485 today!

## OUTLINE DRAWING

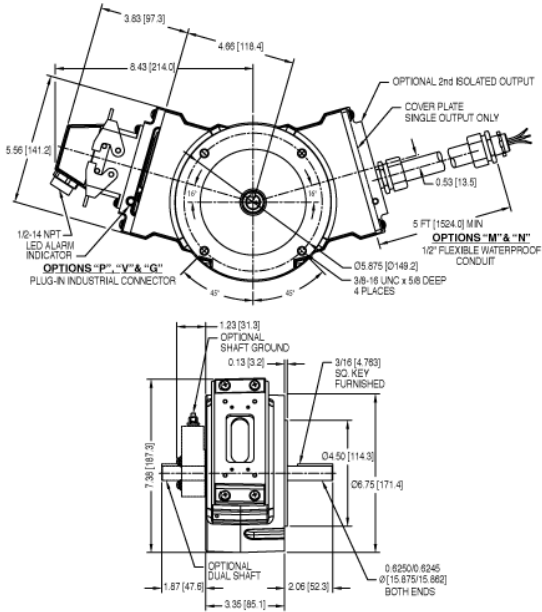

Check out our website for more detailed specifications, drawings, and installation instructions. [www.avtronencoders.com](http://www.avtronencoders.com)

## MORE XR485 ADVANTAGES

- | Foot mount bolt pattern matches explosion-proof analog models exactly
- | Optional K661 signal converter for direct replacement of analog tachs (BC66, etc.)
- | Replaces BEI H38, H40 & Dynapar X25 models
- | Shrugs off dirt, oil, and water contamination
- | Protected against: power-to-phase, short circuits, and reverse voltage wiring problems
- | No glass disks to break or optics to fail

## XR485 SPECIFICATIONS

**Operating Power:** (add cable drive current as req'd)

Division 1, Zone 1 (XRB3): 12-24VDC In, 10.6V Out, 150mA

Division 2, Zone 2: 5-24VDC In/Out, 100mA

**Output Format:** A Quad B with marker (A,/A, B,/B, Z,/Z)

**Frequency Range:** 0 to 165 KHz

**PPR: 8-5000**

**Speed:** 5500 RPM Max. (contact factory for higher speeds)

**Maximum Cable Length:**

Division 1, Zone 1: 400' [120m]

Division 2, Zone 2: 500' [150m] @ 5-12V; 200' [60m] @ 24V

**Temperature:** -40°C to 80°C (Storage -40°C to 100°C)

**Environmental:** Electronics-IP67, IP66 overall (see manual for details)

**Vibration:** 5-2000Hz, 18G; 100G Shock

**Weight:** 14 lbs. [6.4 kg]/16lbs [7.3kg] dual output

**Certifications:**

ATEX/IECEx Zone 1 &amp; Zone 21 Group IIC

cULus Class I, Division 1 and Zone 0 Group A,B,C,D\*

ATEX/IECEX Zone 2 &amp; 22 Group IIC

cULus Class I, Division 2 Group A,B,C,D

**\*See installation drawings for Warnings and Limitations**

## SELECTION GUIDE

XR485 PART NUMBERS AND AVAILABLE OPTIONS											
Model	Temp Rating	Foot Bracket	Style	Left Module		Right Module		Connector Options	Modifications		
				Line Driver	PPR	Line Driver	PPR				
XR485	N: -20°C to 80°C C: -40°C to 80°C	X: none 1: A36261 STD 2: BC42/46 style (A25-448)	S: single shaft D: dual shaft	X: none  <b>See chart at right</b>	X: none J-960 F-60 Y-1024 G-100 H-120 H-120 L-240 L-240 N-250 N-250 P-300 P-300 E-360 E-360 Q-500 Q-500 R-512 S-600 V-900	J-960 F-60 Y-1024 G-100 Z-1200 Z-1200 A-128 A-128 L-240 L-240 D-4096 D-4096 P-300 P-300 E-360 E-360 Q-500 Q-500 R-512 S-600 V-900	X: none X: none F-60 Y-1024 G-100 Z-1200 H-120 A-128 A-128 L-240 L-240 D-4096 D-4096 P-300 P-300 E-360 E-360 Q-500 Q-500 R-512 S-600 V-900	See chart at right	000: none 003: w/68k analog converter 004: super magnetic shielding 016: w/ isolator XRB3 for cabinet mount 4xxx: special PPR (see chart) 9xxx: spec'l cable length (xxx-ft)		

Line Driver Code				Connector Options
Level 1		Level 2		
Class 1 Dvr 1	Zone 1 & 21 (1a)	Class 1 Dvr 2	Zone 2 & 22	
F	H	n/a	7	<b>A</b> - 10 pin MS W/O Plug <b>B</b> - 10 pin MS with Plug
F	H	n/a	7	<b>*</b> - 7 Pin MS
F	H	n/a	7	<b>R</b> - 10 Pin mini twist lock
F	H	n/a	7	<b>W</b> - Flexible cable with Gland
F	H	n/a	7	<b>G</b> - 10 Pin Industrial with Plug
F		G		<b>4</b> - Conduit Box, Terminal Block 1/2" NPT
F		G		<b>5</b> - Conduit Box, Terminal Block 3/4" NPT
F		G		<b>6</b> - Conduit Box, Terminal Block 1" NPT
F		G		<b>7</b> - Conduit Box, Terminal Block 25mm PT
XRB3	XRB3	None	None	<b>Required Isolator: order separately or with option code 018</b>

\* = E, F, J, K, S, T, U, V.

Units with connector options 4, 5, 6, or 7 are dual labeled for for both cULus  
Class / Div and ATEX / IECEx Zones



Nidec Industrial Solutions  
243 Tuxedo Avenue - Cleveland, Ohio 44131

encoderhelpdesk@nidec-industrial.com  
+1 216-642-1230 - [www.avtronencoders.com](http://www.avtronencoders.com)

Features and specifications are subject to change without notice.  
EU-SMART™, SMARTSafe™, SMARTTach™, THIN-LINE™, WIDE-GAP™,  
SAFETach™ and BULLSEYE32™ are trademarks of Nidec Industrial Solution.  
All other trademarks and registered trademarks are the property of their  
respective owners. Nidec Industrial Solutions' standard warranty applies.  
All dimensions approximate.

