


Avtron XR85 SMARTSafe™ Encoders

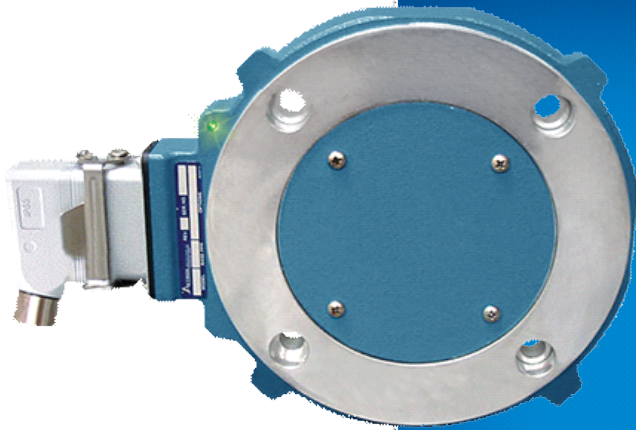

Hazardous Duty Magnetic Encoder, Heavy Duty 8.5" Modular

Revolutionary No Bearing Design

- | Fits NEMA 8.5" Flanges for ABB, Baldor, GE, Marathon Blue Max, Reliance & Reuland Motors
- | ATEX/IECEx Rated for Zone 1, 2, 21 & 22 Applications
- | Ideal for Oil and Gas Applications
 - | No Bearings to Wear Out
 - | Fully Potted Electronics
 - | Up to 5000 PPR
- | Wide Sensor-Rotor Gap: No Shimming or Scraping
- | Protected Against Wiring Errors
- | Self-Diagnostic LED and Alarm Output
 - | 3 Year No-Hassle Warranty
- | cULus Class I Division 1 Groups A,B,C,D Listed
- | cULus Class I Zone 0 Group IIC
- | cULus Class I Division 2 Groups A,B,C,D Listed

XR85

XR85 SMARTSafe 8.5" modular rotary incremental quadrature encoders are a breakthrough in hazardous duty encoders. They are ATEX and UL approved and offer incredibly reliable no-bearing construction! SMARTSafe encoders can be used in gas and ATEX dust hazardous environments. Also available: hollow shaft models (XR45, XR685), shafted models (XR4F, XR485), and no-bearing modular encoders to fit other flange sizes (XR56, XR115, XR125, XR850).

For applications requiring ATEX/IECEx Zone 2 or 22 or UL Class I, Division 2, Groups A,B,C,D use the XR85 directly in your application, with no barrier, isolator or cable gland required.

For applications requiring UL Division 1, ATEX/IECEx Zone 1 or 21, protection use the XRB3 isolator in your control cabinet which permits the use of intrinsically safe wiring instead of explosion-proof conduit or glands. The XR85 can also be used in UL Class I Div 1 & Zone 0 applications using the XRB3 Isolator.

Unlike the competition, Avtron SMARTSafe encoder systems are protected against short circuits, power-to-output wiring, and output-to-ground faults.

Instead of relying on a tiny optical encoder with weak bearings, install the most rugged encoders available for your drilling or industrial applications. Vibration, shock, liquids, dust and dirt won't harm SMARTSafe encoders! Paint booths, draw works, coil tubing rigs...XR85 can keep them all working 24/7/365.

Eliminate the biggest cause of industrial encoder failure--eliminate the bearings with XR85 hazardous duty encoders

OUTLINE DRAWING

MORE XR85 ADVANTAGES

- Replaces BEI H38 and Dynapar X25 explosion-proof encoders
- Eliminates large & costly flange adapters & flowerpots
- Fits shafts 0.500" - 3.188" [10 - 85 mm]
- Thin profile reduces overall motor depth
- No air gap adjustment required
- Shrugs off dirt, oil, and water contamination
- No glass disks to break or optics to fail
- 4,500,000+ hour MTBF design

XR85 SPECIFICATIONS

Operating Power: (add load and cable drive current as req'd)

Division 1, Zone 1 (XRB3): 12-24VDC In/Out, 150 mA

Division 2, Zone 2: 5-24VDC In/Out, 150mA

Output Format: A Quad B with marker (A/A, B/B, Z/Z)

Frequency Range: 0 to 165 KHz

Maximum Cable Length:

Division 1, Zone 1: Encoder 500' Isolator 1000'

Division 2, Zone 2 (5 to 12 VDC in): 500'

Division 2, Zone 2 (15 to 24 VDC in): 250'

Temperature: -40°C to 80°C (storage -40°C to 100°C)

Environmental: IP54 (see manual for details)

Vibration: 5-2000Hz, 20G, 100G Shock

Weight: 2-3lbs [.9-1.4kg]

Certifications:

ATEX/IECEx Zone 1 & 21 Group IIC

cULus Class I Div 1 and Zone 0 Group A,B,C,D*

ATEX/IECEx Zone 2 & 22 Group IIC

cULus Class I Div. 2 Groups A,B,C,D

*See installation drawings for Warnings and Limitations.

Check out our website for more detailed specifications, drawings, and installation instructions. www.avtronencoders.com

SELECTION GUIDE

XR85 PART NUMBERS AND AVAILABLE OPTIONS

Model	Housing Type	Shaft Size (Thru Shaft Rotor)	Cover Style	Line Driver	Single/Left Output (PPR)	Right Output (PPR)	Connector	Modifications
XR85	1- Single Output 2- Dual Output	C0- Non-std. Shaft Size X0- None Thru Shaft Rotor (Metric) US CA- 0.500 D2- 10mm CB- 0.625 D3- 12mm CC- 0.875 D4- 14mm CD- 0.938 D5- 15mm CE- 1.000 D6- 16mm CF- 1.125 D4- 18mm CG- 1.250 D6- 18mm CH- 1.375 D6- 24mm CI- 1.500 D6- 28mm CJ- 1.625 D8- 30mm CK- 1.750 D1- 32mm CL- 1.875 D1- 38mm CM- 2.000 D1- 38mm CN- 2.125 D1- 42mm CO- 2.250 D1- 45mm CP- 2.375 D1- 48mm CR- 2.500 D1- 52mm TS- 2.625 D1- 55mm TU- 2.875 D1- 60mm TV- 3.000 D1- 65mm T4- 3.125 D1- 70mm T7- 3.188 D1- 75mm MY- 80mm MZ- 85mm	E- Extended Shaft Cover F- Flat Cover T- Flat Thru- Hole Cover with Shaft Seal	See chart at right	F- 60 Y- 1024 G- 100 Z- 1200 H- 120 3- 2000 A- 128 4- 2048 L- 240 5- 2500 N- 256 D- 4096 P- 300 6- 4800 B- 480 0- Non- std. Q- 500 R- 512 S- 600 V- 600 J- 960	X- None Y- 1024 F- 60 Z- 1200 G- 100 3- 2000 H- 120 4- 2048 L- 240 5- 2500 D- 4096 N- 256 6- 4800 P- 300 9- 5000 0- Non- std. R- 512 S- 600 V- 900 J- 960	See chart at right	000- No Modification 005- Super Magnetic Shielding 018- w/ Isolator XRB3 for cabinet mount 4xx- Special PPR Code, consult factory 9xx- Special Cable Length, xxx=length in feet

* Set Screw Rotor only

Line Driver Code				Connector Options
Level 1		Level 2		
Class 1 Div 1	Zone 1 & 21 (II)	Class 1 Div 2	Zone 2 & 22	
F	H	n/a	7	
F	H	n/a	7	
F	H	n/a	7	
F	H	n/a	7	
F	H	n/a	7	
F	H	n/a	7	
F	H	n/a	7	
F		G		
F		G		
F		G		
F		G		
XRB3	XRB3	None	None	

Required Isolator: order separately or with option code 018			
---	--	--	--

*= E, F, J, K, S, T, U, V

Units with connector options H, M, N or B are dual labeled for for both cULus Class / Div and ATEX / IECEx Zones



Nidec Industrial Solutions

243 Tuxedo Avenue - Cleveland, Ohio 44131

encoderhelpdesk@nidec-industrial.com

+1 216-642-1230 - www.avtronencoders.com



Features and specifications are subject to change without notice.
EU-SMART™, SMARTSafe™, SMARTTach™, THIN-LINE™, WIDE-GAP™,
SAFETach™ and BULLSEYE32™ are trademarks of Nidec Industrial Solution.
All other trademarks and registered trademarks are the property of their
respective owners. Nidec Industrial Solutions' standard warranty applies.
All dimensions approximate.