


Avtron XR56 SMARTSafe™ Encoders

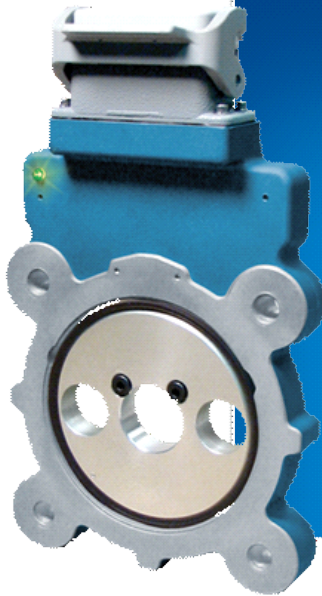

Hazardous Duty Magnetic Encoder, Heavy Duty 4.5" Modular

Revolutionary No Bearing Design

- | Fits NEMA 4.5" Flanges for Marathon Blue & Black Max, Reliance & Reuland Motors
- | ATEX/IECEx Rated for Zone 1, 2, 21 & 22 Applications
 - | Ideal for Oil and Gas Drilling
 - | No Bearings to Wear Out
 - | Fully Potted Electronics
 - | Up to 5000 PPR
- | Wide Sensor-Rotor Gap: No Shimming or Scraping
 - | Protected Against Wiring Errors
- | Self-Diagnostic LED and Alarm Output
 - | 3 Year No-Hassle Warranty
- | cULus Class I Division 1 Groups A,B,C,D Listed
- | cULus Class I Zone 0 Group IIC
- | cULus Class I Division 2 Groups A,B,C,D Listed

XR56

XR56 SMARTSafe 4.5" modular incremental quadrature rotary encoders are a breakthrough in hazardous duty encoders. They are ATEX and UL approved and offer incredibly reliable no-bearing construction! SMARTSafe encoders can be used in gas and ATEX dust hazardous environments. Also available: hollow shaft models (XR45, XR685), shafted models (XR4F, XR485), and no-bearing modular encoders to fit other flange sizes (XR85, XR115, XR125, XR850).

For applications requiring ATEX/IECEx Zone 2 or 22 or UL Class I, Division 2, (gas) Groups A,B,C,D use the XR56 directly in your application with no barrier, isolator or cable gland required.


For applications requiring UL Division 1, ATEX/IECEx Zone 1 or 21 protection use the XRB3 isolator in your control cabinet which permits the use of intrinsically safe wiring instead of explosion-proof conduit or glands. The XR56 can also be used in UL Class I Div 1 & Zone 0 applications using the XRB3 Isolator.

Unlike the competition, Avtron SMARTSafe encoder systems are protected against short circuits, power-to-output wiring, and output-to-ground faults.

Instead of relying on a tiny optical encoder with weak bearings, install the most rugged encoders available for your drilling or industrial applications. Vibration, shock, liquids, dust and dirt won't harm SMARTSafe encoders! Paint booths, draw works, coil tubing rigs...XR56 can keep them all working 24/7/365.

Eliminate the biggest cause of industrial encoder failure--eliminate the bearings with XR56 hazardous duty encoders.

OUTLINE DRAWING

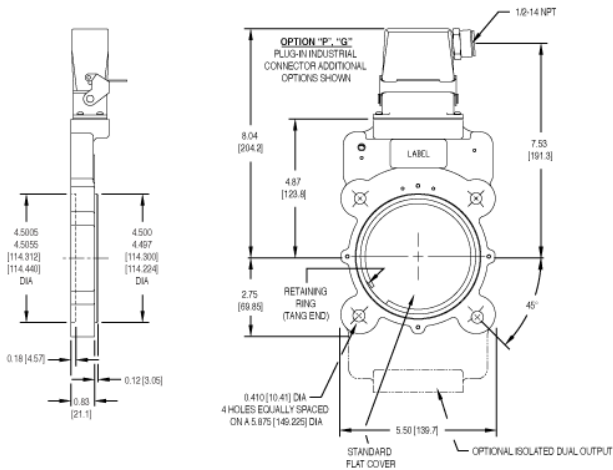

MORE XR56 ADVANTAGES

- | Replaces BEI H38 and Dynapar X25 explosion-proof encoders
- | Eliminates large & costly flange adapters & flowerpots
- | Fits shafts 0.500" - 3.188" [10 - 85 mm]
- | Thin profile reduces overall motor depth
- | No air gap adjustment required
- | Shrugs off dirt, oil, and water contamination
- | No glass disks to break or optics to fail
- | 4,500,000+ hour MTBF design

XR56 SPECIFICATIONS

Operating Power: (add load and cable drive current as req'd)

Division 1, Zone 1 (XRB3): 12-24VDC In/Out, 150 mA

Division 2, Zone 2: 5-24VDC In/Out, 150mA

Output Format: A Quad B with marker (A,/A, B,/B, Z,/Z)

Frequency Range: 0 to 165 KHz

Maximum Cable Length:

Division 1, Zone 1: Encoder 500' Isolator 1000'

Division 2, Zone 2 (5 to 12 VDC in): 500'

Division 2, Zone 2 (15 to 24 VDC in): 250'

Temperature: -40°C to 80°C (storage -40°C to 100°C)

Environmental: IP54 (see manual for details)

Vibration: 5-2000Hz, 20G, 100G Shock

Weight: 2-3lbs [.9-1.4kg]

Certifications:

ATEX/IECEX Zone 1 & 21 Group IIC

cULus Class I Div 1 and Zone 0 Group A,B,C,D*










ATEX/IECEx Zone 2 & 22 Group IIC

cULus Class I Div. 2 Groups A,B,C,D

***See installation drawings for Warnings and Limitations.**

SELECTION GUIDE

XR56 PART NUMBERS AND AVAILABLE OPTIONS

								
Model	Housing Type	Shaft Size (Thru-Shaft Rotor)	Cover Style	Line Driver	Single/Left Output (PPR)	Right Output (PPR)	Connector	Modifications
XR56A	1- Single Output 2- Double Output	CO- None-std. Shaft Size XZ- None Thru-Shaft Rotor (Metric) US Metric CB-0.500 D2- 10mm CB-0.625 D3- 12mm CC-0.875 DB- 14mm CC-0.938 DC- 15mm CE- 1.000 DD- 16mm CF- 1.125 D4- 18mm CG- 1.250 DE- 19mm CH- 1.375 DF- 24mm CT- 1.500 DG- 28mm CJ- 1.625 DH- 30mm CK- 1.750 DT- 32mm CL- 1.875 DJ- 36mm CM-2.000 DK- 38mm CN-2.125 DL- 42mm CO-2.250 DM- 45mm CP-2.375 DN- 48mm CR-2.500 DP- 52mm TS- 2.625* DR- 55mm TU- 2.875* DS- 60mm TV- 3.000* MU-65mm* T4- 3.125* MW- 70mm* T7- 3.188* NW-75mm* MY- 80mm* MZ- 85mm*	E- Extended Shaft Cover F- Flat Cover T- Flat Thru-Hole Cover with Shaft Seal	See chart at right	F: 60 Y: 1024 G: 100 Z: 1200 H: 120 3- 2000 A: 128 4- 2048 L: 240 5- 2500 N: 256 D- 4096 P: 300 8- 4800 E: 360 9- 5000 B: 480 0- Non-std. Q: 500 R: 512 S: 600 V: 900 J- 960	X: None Y: 1024 F: 60 Z: 1200 G: 100 3- 2000 H: 120 4- 2048 A: 128 5- 2500 L: 240 D- 4096 N: 256 8- 4800 P: 300 9- 5000 E: 360 0- Non-std. B: 480 R: 512 S: 600 V: 900 J- 960	See chart at right	000- No Modification 005- Super Magnetic Shielding 018- w/ Isolator XRB3 for cabinet mount 4xx- Special PPR Code, consult factory 9xx- Special Cable Length, xx=length in feet

* Set Screw Rotor Only

Line Driver Code					Connector Options
Level 1		Level 2			
Chr1 Dlv 1	Zone 1 & 21 (a)	Chr1 Dlv 2	Zone 2 & 22		
F	H	n/a	7	C- 10 pin MS (Autron)	
F	H	n/a	7	D- 10 pin MS (Dynapar)	
F	H	n/a	7	* - 7 Pin MS	
F	H	n/a	7	R- 10 Pin mini twist lock	
F	H	n/a	7	W- Flexible cable with Glue	
F	H	n/a	7	G- 10 Pin Industrial with Plug	
F		G		H- Conduit Box, Terminal Block 1/2" NPT	
F		G		M- Conduit Box, Terminal Block 3/4" NPT	
F		G		N- Conduit Box, Terminal Block 1" NPT	
F		G		8- Conduit Box, Terminal Block 25mm PT	
XR3B	XR3B	None	None	Required Isolder: order separately or with option code 018	

Units with connector options H, M, N or 8 are dual labeled for for both cULus Class / Div and ATEX / IECEx Zones

* = E, F, J, K, S, T, U, V.



Nidec Industrial Solutions

243 Tuxedo Avenue - Cleveland, Ohio 44131

encoderhelpdesk@nidec-industrial.com

+1 216-642-1230 - www.avtronencoders.com

Features and specifications are subject to change without notice.
EU-SMART™, SMARTSafe™, SMARTTach™, THIN-LINE™, WIDE-GAP™,
SAFETach™ and BULLSEYE32™ are trademarks of Nidec Industrial Solution.

All other trademarks and registered trademarks are the property of their respective owners. Nidec Industrial Solutions' standard warranty applies.

All dimensions approximate.